POWERFAB

125WTD

SELF TRAILERING

DRIVE SKID STEER

IVIINI EXCAVATOR





125 WT

SELF TRAILERING


WALKING

MINI EXCAVATOR

EASILY TOWED BY CAR OR LIGHT TRUCK

DIGS IN AREAS INACCESSIBLE TO BIGGER MACHINES

SOLVES TOUGH DIGGING, TRENCHING AND EXCAVATING PROBLEMS OF NARROW WIDTHS, CONFINED AREAS, TIGHT ACCESS AND LOW OVERHEAD CLEARANCES

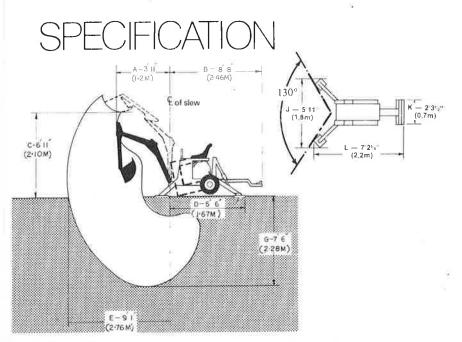

AN 11 HP 8'-6" DEEP DIG VERSION IS AVAILABLE

WEIGHT (125 WT) 5 HP - 590kg, 8 HP - 620kg, 11 HP - 690kg (125 WTD) 8 HP = 690kg, 11 HP - 720kg

SPEED (125 WTD) 3 mph

HYDRAULIC SUPPLY (125 WTD) 8 HP - 13 LPM, 11 HP - 24 LPM (125 WT) 5 HP - 9 LPM, 8 HP - 13 LPM, 11 HP - 24 LPM

Standard Engine Honda Air Cooled Petrol Engine

ENGINE OPTION: 9HP YANMAR AIR COOLED DIESEL

MAXIMUM DIGGING BUCKET FORCE 1.9 TON

VARIOUS DIGGING BUCKET WIDTHS AND CAPACITIES ARE AVAILABLE

STANDARD BUCKET WIDTH: 8" (203 mm)

16" (406 mm) 20" (508 mm)


24" (609 mm)

MATERIAL HANDLING BUCKET 24" (609 mm)

FACE SHOVEL

24" (609 mm)

FRONT OUTRIGGERS 125WTD HYDRAULIC VERTICAL ADJUSTMENTS FRONT OUTRIGGERS 125WT MANUAL VERTICAL ADJUSTMENT REAR OUTRIGGERS 125 WTD AND 125 WT HYDRAULICALLY ADJUSTABLE ALSO AVAILABLE: TINE BUCKET, GRABS, POLE HOLE BORER, LIFTING JIB



DRIVE AROUND WITH THE 125 WTD

Hydrostatic transmission enables the operator to drive around the site and travel on road where hilis and gradients are easily negotiated.

ON ROAD TOWING

Towing mobility is a feature of this machine. It can be quickly converted to on road self trailing at a speed of 45mph

- ★ THE WIDTH IS JUST 2'3\\" = (0.7 m) to allow access to really small
- * ALL FACILITIES REMAIN ATTACHED for offset digging all you do is change the position of the stabilizer legs, and the wheels to the required position. The wheels may be removed for access to really tight corners
- * HARD STEEL REPLACEABLE BUSHES - fitted to all pin joints





ROAD SURFACE PROTECTION if the machine is kept hitched to the towing vehicle, the anchorage stops forward movement and rubber feet attached to the stabilizers protect the road surface



EASY TOWING - the machine can be towed by an average size car or truck, and when removed can be easily manoeuvred by






THE OPTIONAL H.P.T.O. CONNECTIONS ENABLE YOU TO POWER A RANGE OF HYDRAULICALLY OPERATED IMPLEMENTS

ANCILLARY EQUIPMENT

THESE INCLUDE BREAKERS, CIRCULAR AND CHAINSAWS, DRILLS, POLE HOLEBORERS, BRUSHERS, WATERPUMPS, PRUNERS ETC

Due to our policy of continue improvement, we reserve the right to ammend design or specification without pior notice

For further information why not ask to see our video film?

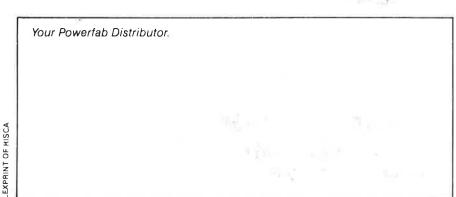



SALES & SPARES LIMITED FAIR VIEW, ASHVALE, TREDEGAR, GWENT NP2 3HA UNITED KINGDOM.

TELEPHONE: 049525 - 6627. TELEX: 498973 POWFAB G.

FAX: 0495 - 718162

PRICE LIST Ex. Works. W.E.F.23/4/90

EXPORT CRATE PRICE - £120.00

125 WTD

WALKING/SELF TRAILERING WALKING/SELF TRAILERING/DRIVE WALKING STANDARD SPECIFICATION STANDARD DRIVE SPECIFICATION STANDARD DIGGER ALL STEEL CONSTRUCTION SKID STEER POWERED BY 5/8HP OR 11 HP PETROL AIR HYDROSTATIC TRANSMISSION COOLED HONDA ENGINE. ENGINE POWERED a 2 MANUALLY VERTICALLY AND RADIALLY a FRONT AND REAR OUTRIGGERS VERTICALLY OPERATED, HYDRAULICALLY WITH FRONT POSITIONED OUTRIGGERS. b 1 HYDRAULICALLY VERTICALLY POSITIONED REAR OUTRIGGER. RADIALLY POSITIONED 1 16" BUCKET MANUALLY. d SELF TRAILERING b 16" BUCKET c SELF TRAILERING POWERFAB 125 W5 14. 125W 5 HP DIGGER (LESS SELF TRAILERING) 2 MANUALLY RADIALLY POSITIONED NOT APPLICABLE OUTRIGGERS VERTICALLY FIXED. £3030.00 9.8 NON STANDARD TO SPECIFICATION. POWERFAB 125WT5 125WT 5HP DIGGER NOT APPLICABLE £3600.00 AS STANDARD TO SPECIFICATION. WERFAB 125WT8 POWERFAB 125WTD 125WT 8HP DIGGER SKID STEER DIGGER (11HP) HYDROSTATIC DRIVE £4030.00 AS STANDARD TO SPECIFICATION £5900.00 POWERFAB 125WT11H POWERFAB 125WTD11H SKID STEER DIGGER (11 HP) 125WT 11HP DIGGER HYDROSTATIC DRIVE WITH HYDRAULIC POWER TAKE OFF WITH HYDRAULIC POWER TAKE OFF APPLICATION, HAND HELD, (HPTO) 21.6 LPM (4.8 GPM) at 138 BAR APPLICATION, HAND HELD (HPTO) 21.6 LPM (4.8 GPM) AT 138 PAR (2000 PSI) (2000 PSI) £4770.00 £6700.00 AS STANDARD TO SPECIFICATION.

SEE BROCHURE NO: 0209

BUILD OPTIONS

	DISCRIPTION	PPICE
, , , , , , , , , , , , , , , , , , ,		0000 00
	DIESEL ENGINE AIR COOLED, ELECTRIC START.	£900.00
8'6" (2.6m) DIGGING DEFTH ON 8HP AND 11HP MODELS		£205.00
VICE WHEELS (8") INST	EAD OF STANDARD (EACH)	£ 55.00
HYDRAULIC EARTH DRILL 2780.00 .	HEAD (HEAVY DUTY) USED WITH SINGLE HPTO	
AUGERS TO SUIT:		
6" DIAMETER		£308.00
8" DIANETER		£340.00
10" DIAMETER		£375.00
12"	DIAMETER	£405.00
	OPTIONAL EXTRAS	
	DISCRIPTION	
POWERFAB BREAKER.	MACHINE HELD BREAKER INCLUDING SIDE PLATES, HOSES AND 1 STEEL.	£3080.00
STANLEY BREAKER.	HAND HELD BREAKER BR45 INCLUDING HOSES AND 1 STEEL.	£1210.00
CONCRETE SAW.	PRICE ON APPLICATION.	
125 GRAB.	GFAB MECHANISM 2 1/2 DIA. RAN 6" STROKE, MAX WORKING PRESSURE 186 BAR (2700 PSI).	£595.00
8" BUCKET	8" (20 CM) WIDE DIGGING BUCKET. 2 TEETH. CAPACITY 0.024M	£148.00
8" EUCKET	8" (20 CM) WIDE CLAY DIGGING BUCKET.	£148.00
	DESCRIPTION OF THE PROGRAM OF THE PR	£165.00
12" BUCKET	12" (30 CM) WIDE DIGGING PUCKET. 3 TEETH. CAPACITY 0.035M	2105.00
16" BUCKET	16" (41 CM) WIDE SQUARE DIGGING BUCKET. 3 TEETH.	£190.00
20" BUCKET	20" (50 CM) WIDE SQUARE DIG BUCKET. 4 TEETH. CAPACITY 0.55M	£215.00
		0020 00
24" BUCKET	24" (61 CM) WIDE DIGGING BUCKET. 4 TEETH. CAPACITY 0.07M.	£230.00
36" BUCKET	36" (91 CM) WIDE MATERIAL HANDLING BUCKET.	£230.00
WA/125/0059	PACK FILLING BLADE. 4FT LONG	£160.00
WA/125/0018	GCOSENECK TFOLLEY	£ 95.00
WA/125/0170	RUBBER LAMINATED FOOT PAD (FACH)	£187.00
	RCBUST CANVAS AND HIGH DENSITY POLYTHENE CAB FOR COMPLETE WEATHER PROTECTION.	£470.00
WA/125/0035	CAPSTAN WINCH.	£616.00
	RIPPING TOOTH	£132.0
	SPFAC.	£ 80.00