






POMERFAB




HYDRAULIC CARRIER FOR MOUNTING CUSTOMERS SPECIALIZED EQUIPMENT

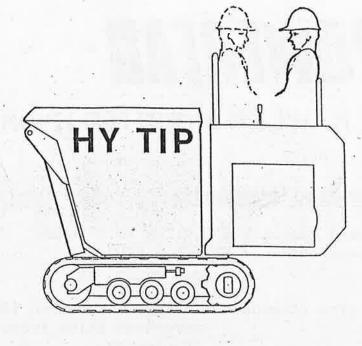


-DUMPER

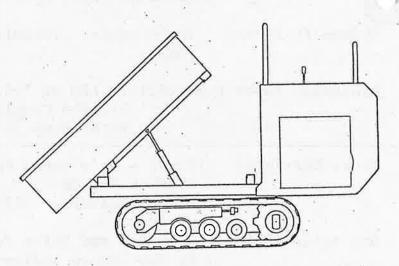

REAR OR THREE WAY TIP

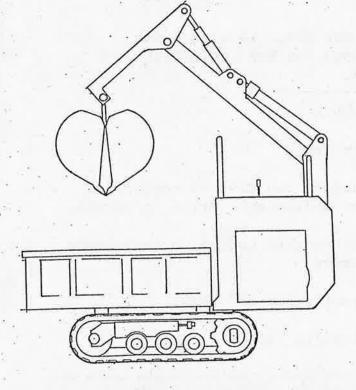

CRANE OR GRAB LOADER

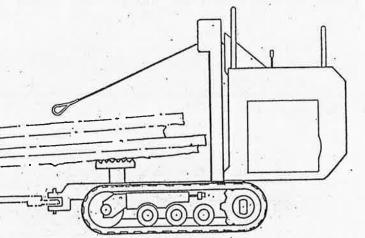

LOG HANDLING CARRIER AND HYDRAULIC WINCH

POWERFAB

Specification

CRAWLER MOUNTED HYDRAULIC CARRIER

TECHNICAL INFORMATION

Rated capacity 650 Kilos to 1 Tonne. Max Speed: 3.7 MPH (6.5 KPH).

Engine (Standard): Briggs & Stratton 15HP Twin Cylinder Air-Cooled

Overhead Valve Petrol Engine (Briggs & Stratton

Vanguard).

Tugine (Optional): Mitsubishi 2 Cylinder Water Cooled Engine

Electric Start Diesel 11.2 KW at 3600 RPM.

Hydraulic System: Turbo Cooled Hydraulic System Tandem Hydraulic

Pump.

Hydraulic Power Take Off: 26 LPM at 186 Bar Complete with Quick

Release Couplings for Hand Held Breaker

Water Pump etc.

Under Carriage: Track - Reinforced Rubber

Width - 200 MM

No. of Rollers - 3 Per Track

Operation (Drive): Steering and Drive Forward and Reverse controlled

by two Levers Indirect Hydrostatic Drive to Tracks.

draulic Carrier: Supplied for attaching special bodies on attachment

to customers requirements.

Hydraulic Tip: 1 Tonne capacity hydraulic tip 50" high.

3 Way Hydraulic Tip: Single on 3 way Hydraulic Tip.

Due to Company Policy of continual improvement we reserve the right to change the design or specification at any time without notice. For exact information about any modification contact manufacturer or dealer.

Your Powerfab Distributor.


POWERFAB

SALES & SPARES LIMITED FAIR VIEW, ASHVALE, TREDEGAR, GWENT NP2 3HA

UNITED KINGDOM.

TELEPHONE: 049525 - 6627. TELEX: 498973 POWFAB G.

FAX: 0495 - 718162

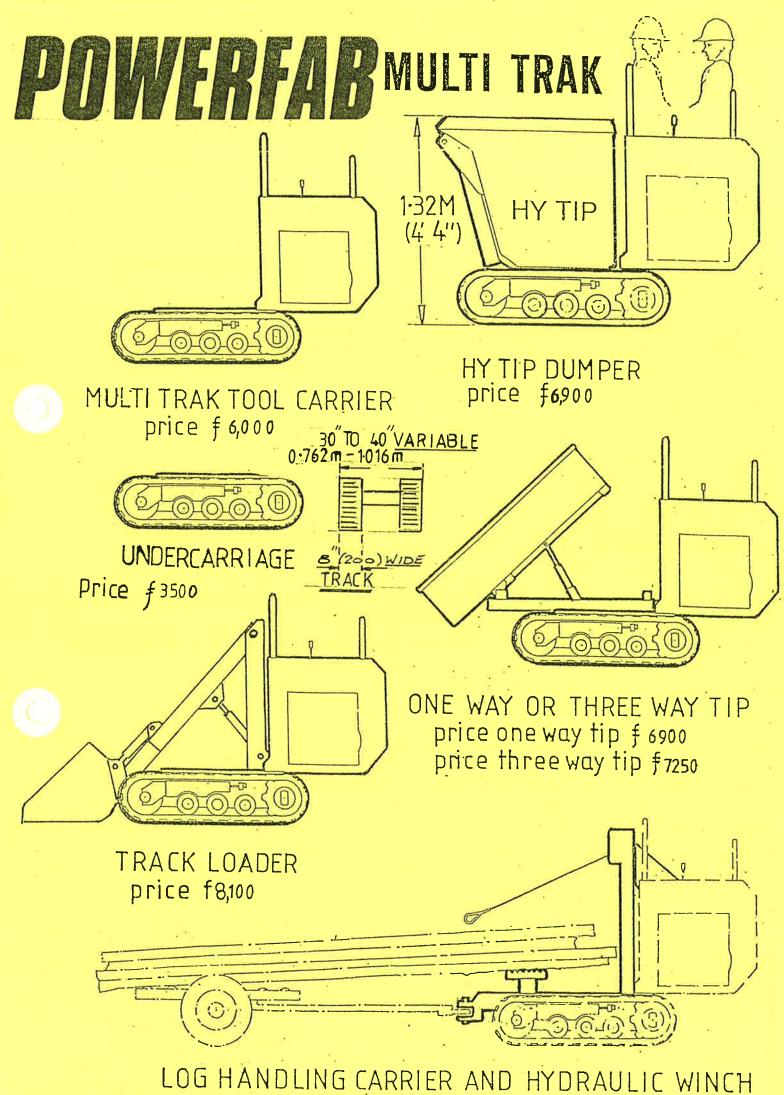

PRICE TO BE ADVISED

MULT TRAK

THE POWERFAB MULTI-TRAK TOOL CARRIER CAN BE SUPPLIED AS A BASIC MACHINE (AS ILLUSTRATED OVERLEAF) ON WHICH CUSTOMERS CAN MOUNT POWERFAB OR THEIR OWN SPECIALIZED EQUIPMENT. IT CAN ALSO BE SUPPLIED WITH ANY ONE OF THE EXTENSIVE RANGE OF POWERFAB FACTORY MOUNTED TOOLS.

APART FROM THE TOOLS SHOWN OVERLEAF, ATTACHMENTS ARE AVAILABLE FOR A WIDE RANGE INCLUDING HYDRAULIC BREAKERS, TRENCHERS POLE HOLE BORERS, DOZER BLADES AND BRUSHES ETC.

THE MACHINE IS ALSO FITTED WITH HYDRAULIC QUICK RELEASE COUPLINGS. THEY ARE FOR USE WITH HAND HELD ANCILLARY EQUIPMENT WHICH INCLUDUES HAND HELD BREAKERS, CIRCULAR AND CHAIN SAWS, DRILLS, WATER PUMPS AND PRUNERS ETC.

FOR FURTHER INFORMATION CONTACT THE SALES DEPARTMENT AS SHOWN BELOW:

TECHNICAL INFORMATION

RATED CAPACITY 650 KILOS TO 1 TONNE.

MAX. SPEED: 3.13 (MPH). 5 (KPH).

ENGINE (STANDARD):

BRIGGS & STRATTON 15HP TWIN CYLINDER AIR-COOLED OVERHEAD VALVE PETROL

ENGINE (BRIGGS & STRATTON VANGUARD).

ENGINE (OPTIONAL):

PERKINS 3 CYLINDER WATER COOLED ENGINE. ELECTRIC START. 21.2HP @ 3600 RPM.

ENGINE WORKING SPEED 2700 RPM.

HYDRAULIC SYSTEM:

TURBO COOLED HYDRAULIC SYSTEM TANDEM HYDRAULIC PUMP.

HYDRAULIC POWER TAKE OFF:

26 LFM AT 186 BAR COMPLETE WITH QUICK RELEASE COUPLINGS FOR HAND HELD

BREAKER WATER FUMP ETC.

UNDER CARRIAGE:

TRACK - REINFORCED RUBBER.

NO. OF ROLLERS - 3 PER TRACK.

WIDTH = 42"

OPERATION (DRIVE):

STEERING AND FORWARD AND REVERSE DRIVE CONTROLLED BY TWO LEVERS.

INDEPENDENT HYDROSTATIC DRIVE TO TRACKS. 3 SPEED.

HYDRAULIC CARRIER:

SUPPLIED FOR FITTING SPECIALBODIES AND ATTACHMENTS TO CUSTOMERS REQUIREMENTS.

HY-TIP:

1 TONNE CAPACITYHYDRAULIC TIP 52" HIGH.

HYDRAULIC TIPPER:

SINGLE OR 3 WAY HYDRAULIC TIP.

Due to our policy of continual improvement, we reserve the right to ammend design or specifications without prior notice.

For further information contact our Sales Dept. at the address given below.


Your Powerfab Distributor.



FAIR VIEW, ASHVALE, TREDEGAR, GWENT NP2 3HA UNITED KINGDOM. TELEPHONE: 049525 - 6627.

TELEX: 498973 POWFAB G.

FAX: 0495 - 718162

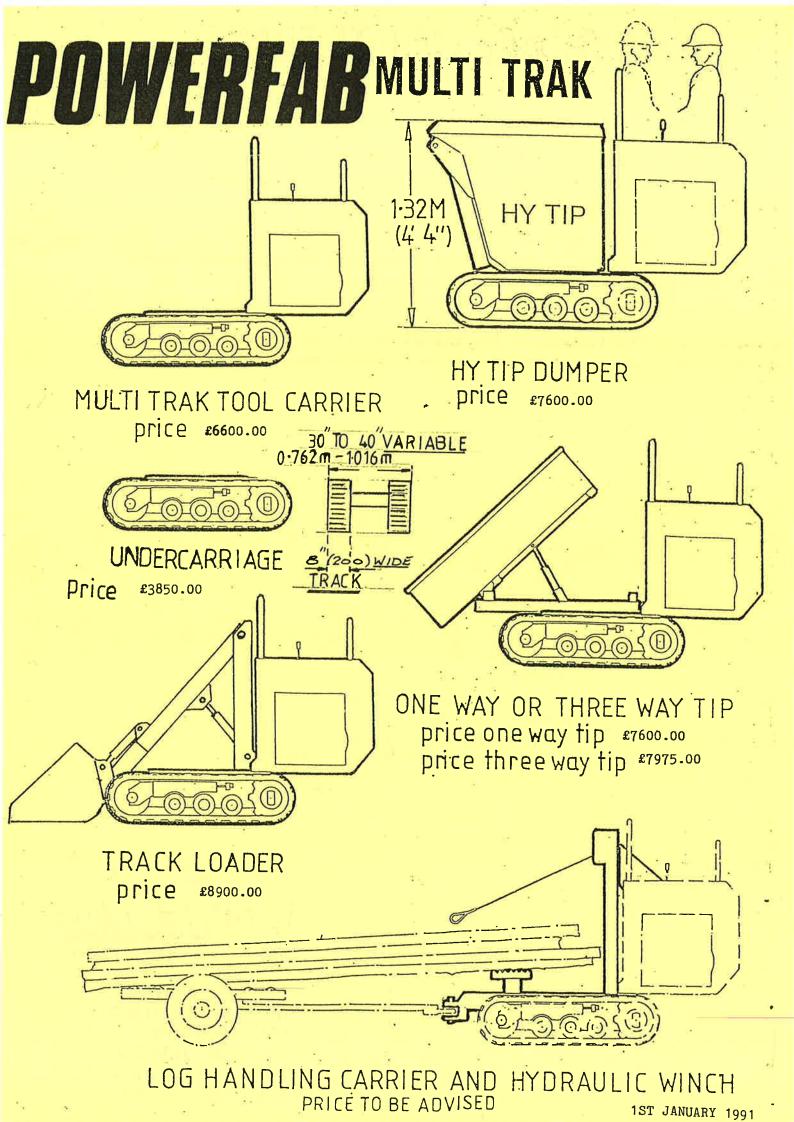

PAMERFAB

R MULTITRAK

THE POWERFAB MULTI-TRAK TOOL CARRIER CAN BE SUPPLIED AS A BASIC MACHINE (AS ILLUSTRATED OVERLEAF) ON WHICH CUSTOMERS CAN MOUNT POWERFAB OR THEIR OWN SPECIALIZED EQUIPMENT. IT CAN ALSO BE SUPPLIED WITH ANY ONE OF THE EXTENSIVE RANGE OF POWERFAB FACTORY MOUNTED TOOLS.

APART FROM THE TOOLS SHOWN OVERLEAF, ATTACHMENTS ARE AVAILABLE FOR A WIDE RANGE INCLUDING HYDRAULIC BREAKERS, TRENCHERS POLE HOLE BORERS, DOZER BLADES AND BRUSHES ETC.

THE MACHINE IS ALSO FITTED WITH HYDRAULIC QUICK RELEASE COUPLINGS. THEY ARE FOR USE WITH HAND HELD ANCILLARY EQUIPMENT WHICH INCLUDUES HAND HELD BREAKERS, CIRCULAR AND CHAIN SAWS, DRILLS, WATER PUMPS AND PRUNERS ETC.

FOR FURTHER INFORMATION CONTACT THE SALES DEPARTMENT AS SHOWN BELOW:

TECHNICAL INFORMATION

RATED CAPACITY 650 KILOS TO 1 TONNE.
MAX. SPEED: 3.13 (MPH). 5 (KPH).

ENGINE (STANDARD):

BRIGGS & STRATTON 15HP TWIN CYLINDER AIR-COOLED OVERHEAD VALVE PETROL

ENGINE (BRIGGS & STRATTON VANGUARD).

ENGINE (OPTIONAL):

PERKINS 3 CYLINDER WATER COOLED ENGINE. ELECTRIC START. 21.2HP @ 3600 RPM.

ENGINE WORKING SPEED 2700 RPM.

HYDRAULIC SYSTEM:

TURBO COOLED HYDRAULIC SYSTEM TANDEM HYDRAULIC PUMP.

HYDRAULIC POWER TAKE OFF:

26 LPM AT 186 BAR COMPLETE WITH QUICK RELEASE COUPLINGS FOR HAND HELD

BREAKER WATER FUMP ETC.

UNDER CARRIAGE:

TRACK - REINFORCED RUBBER.

NO. OF ROLLERS - 3 PER TRACK. - WIDTH = 42"

OPERATION (DRIVE):

STEERING AND FORWARD AND REVERSE DRIVE CONTROLLED BY TWO LEVERS.

INDEPENDENT HYDROSTATIC DRIVE TO TRACKS. 3 SPEED.

HYDRAULIC CARRIER:

SUPPLIED FOR FITTING SPECIALBODIES AND ATTACHMENTS TO CUSTOMERS REQUIREMENTS.

HY-TIP:

1 TONNE CAPACITYHYDRAULIC TIP 52" HIGH.

HYDRAULIC TIPPER:

SINGLE OR 3 WAY HYDRAULIC TIP.

Due to our policy of continual improvement, we reserve the right to ammend design or specifications without prior notice.

For further information contact our Sales Dept. at the address given below.

Your Powerfab Distributor.



FAIR VIEW, ASHVALE, TREDEGAR, GWENT NP2 3HA UNITED KINGDOM.

TELEPHONE: 049525 - 6627. TELEX: 498973 POWFAB G.

FAX: 0495 - 718162